
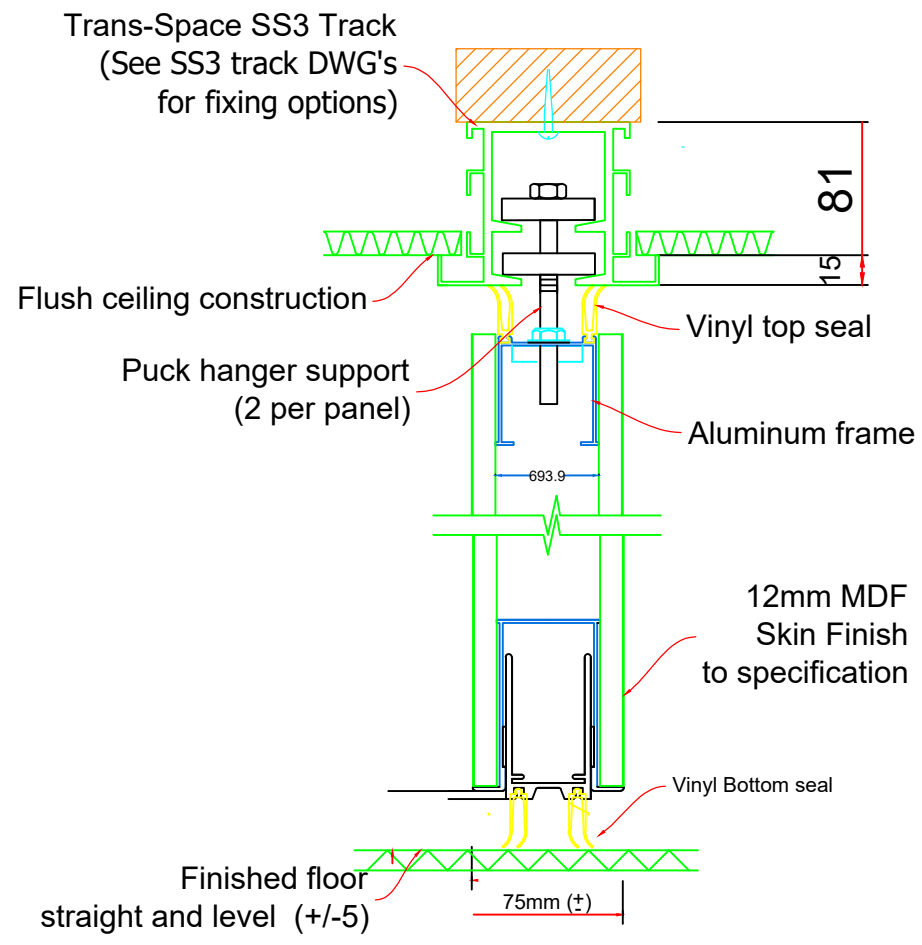



Please Note:-
1. Track Support beam must be level and straight
2. All openings must be Plumb.
3. Floor must be made level to +/- 5mm.
All this allows for maximum acoustic effect and operability.
If any problem occurs in any of these areas, the operation of the door will be compromised

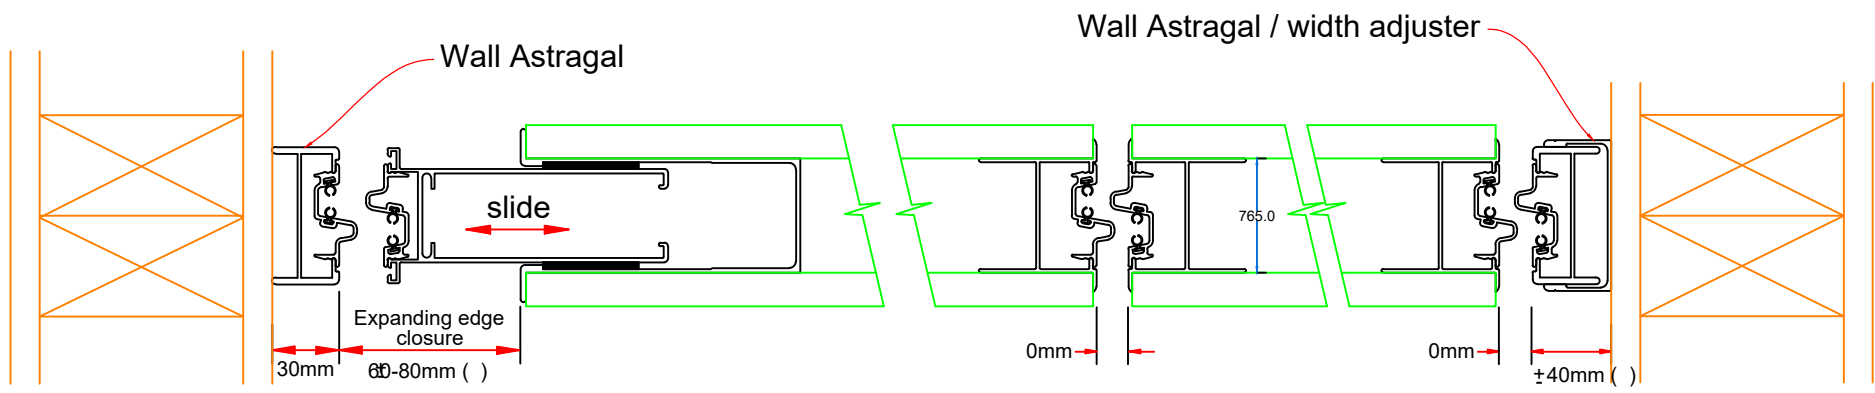


Trail Jamb

Typical Panel Joint

Lead Jamb

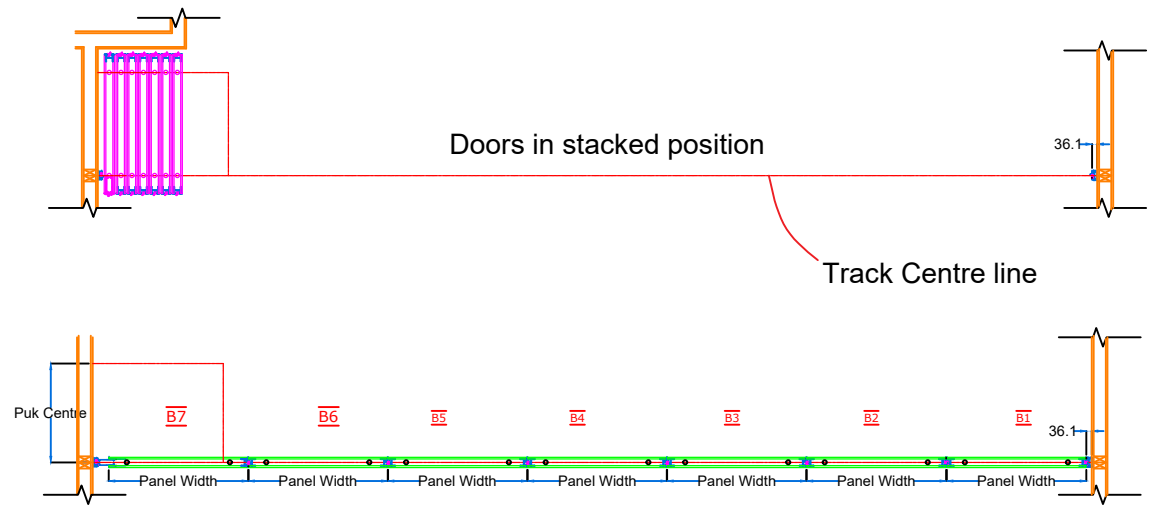

Section A-A

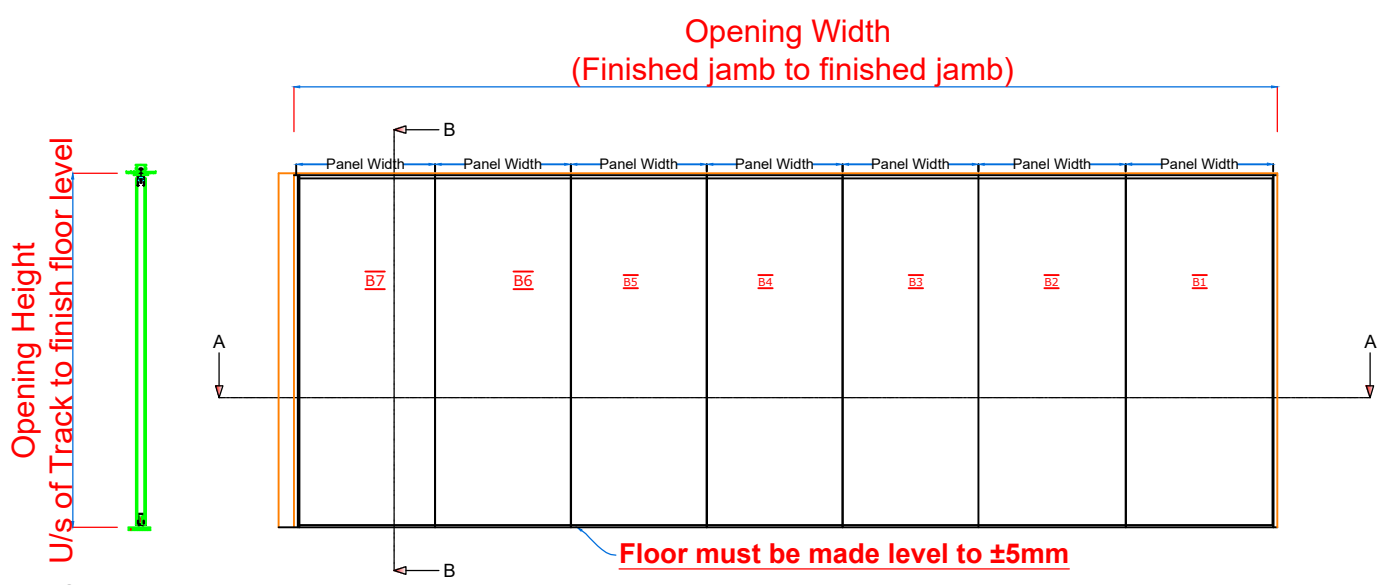

Section B-B

Front Elevation

Horizontal Sectional Details

For Reference Only

PRODUCT	500 Series
TYPE	501
TRACK TYPE	SS3
TRACK FINISH	TBC
CONFIGURATION	Individual Panels
CLOSURE	Expanding Edge
STC	43 / 45 / 47
WEIGHT	43STC=32kg/m² / 45STC=38kg/m² / 47STC=43kg/m²

DRAWING APPROVAL
PLEASE CHECK THE APPROPRIATE BOXES
SIGN AND PRINT NAME

FINISHES	
CRITICAL DIMENSIONS (Red)	
HEIGHT	
WIDTH	

SIGNED BY
PRINT NAME
DATE

COPYRIGHT TRANS-SPACE Ltd. THESE DRAWINGS AND PRODUCTS MADE THEREFROM ARE SUBJECT TO COPYRIGHT UNDER THE NEW ZEALAND COPYRIGHT ACT 1994 AND NEITHER THE DRAWINGSOR PRODUCTS MADE THEREFROM MAY BE REPRODUCED IN ANY MATERIAL FORM OR MODIFIED IN ANYWAY WITHOUT THE WRITTEN APPROVAL OF TRANS-SPACE Ltd.				Name
Rev	Date	Change		

ALUMINIUM TRIM FINISH
PANEL FINISH

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED
0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05
0.1
MACHINED SURFACE FINISH UNLESS OTHERWISE SPECIFIED
1.6

THIRD ANGLE PROJECTION
DIMENSIONS IN MILLIMETRES
PROJECT NAME

DESIGNER	REV
DRAWN Josh G	1
CHECKED	A3
DATE 05/10/2023	1
SCALE AS SHOWN	

TRANS-SPACE
MANAGING SPACE WITH
OPERABLE WALLS AND
DOORS

DESCRIPTION
Generic 501 Panels

CONFIGURATION

JOB NUMBER