

Please Note:-
1. Track Support beam must be level and straight
2. All openings must be Plumb.
3. Floor must be made level to +/- 5mm.
All this allows for maximum acoustic effect and operability.
If any problem occurs in any of these areas, the operation of the door will be compromised

PRODUCT	500 Series
TYPE	502
TRACK TYPE	SS1
TRACK FINISH	TBC
CONFIGURATION	Paired Hinged Panels
CLOSURE	Expanding Edge
STC	43 / 45 / 47
WEIGHT	43STC=32kg/m ² / 45STC=38kg/m ² / 47STC=43kg/m ²
ALUMINIUM TRIM	Powdercoat TBC

DRAWING REVIEW




PLEASE CHECK THE APPROPRIATE BOXES
SIGN AND PRINT NAME

FINISHES	
CRITICAL DIMENSIONS (Red)	
HEIGHT	
WIDTH	


SIGNED BY

PRINT NAME

DATE

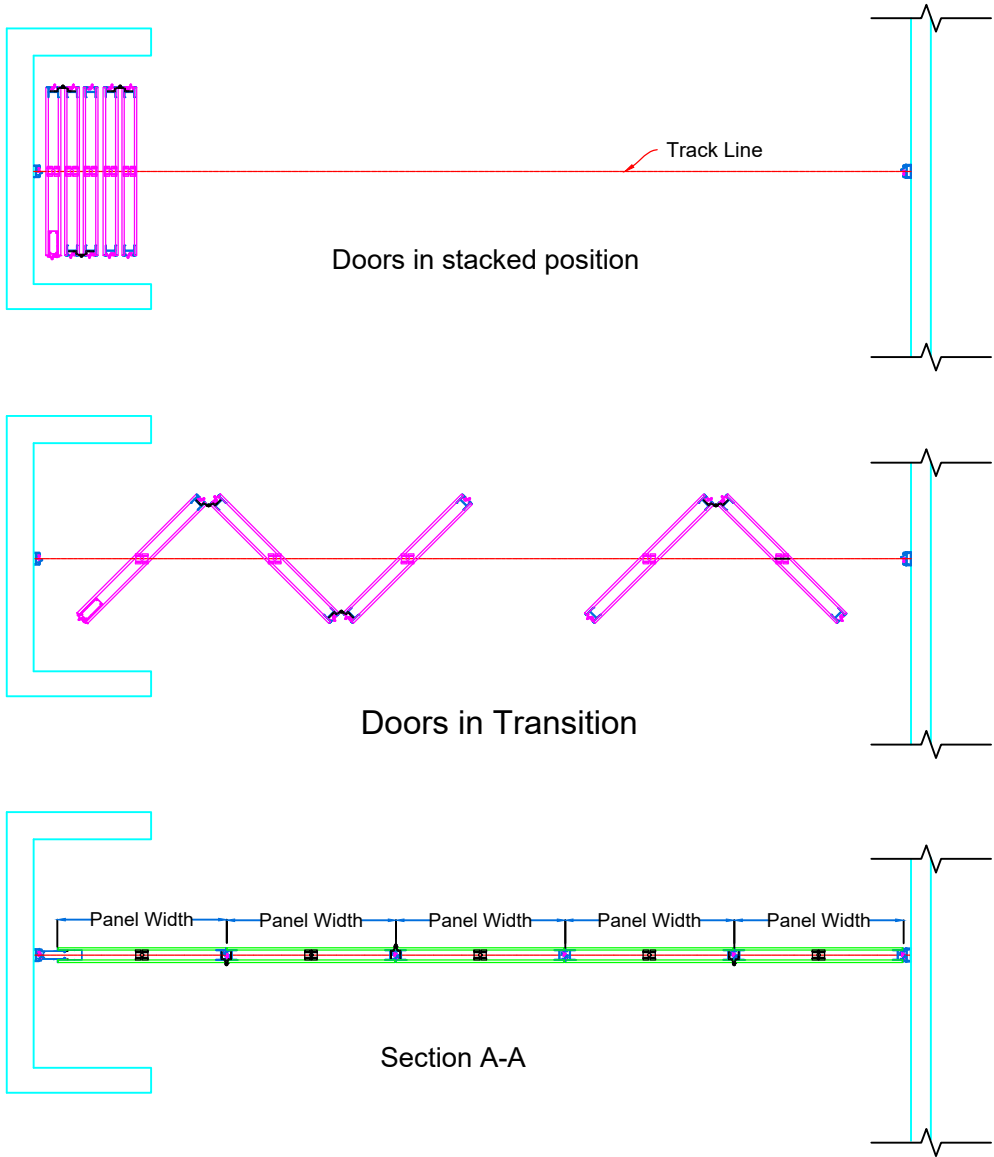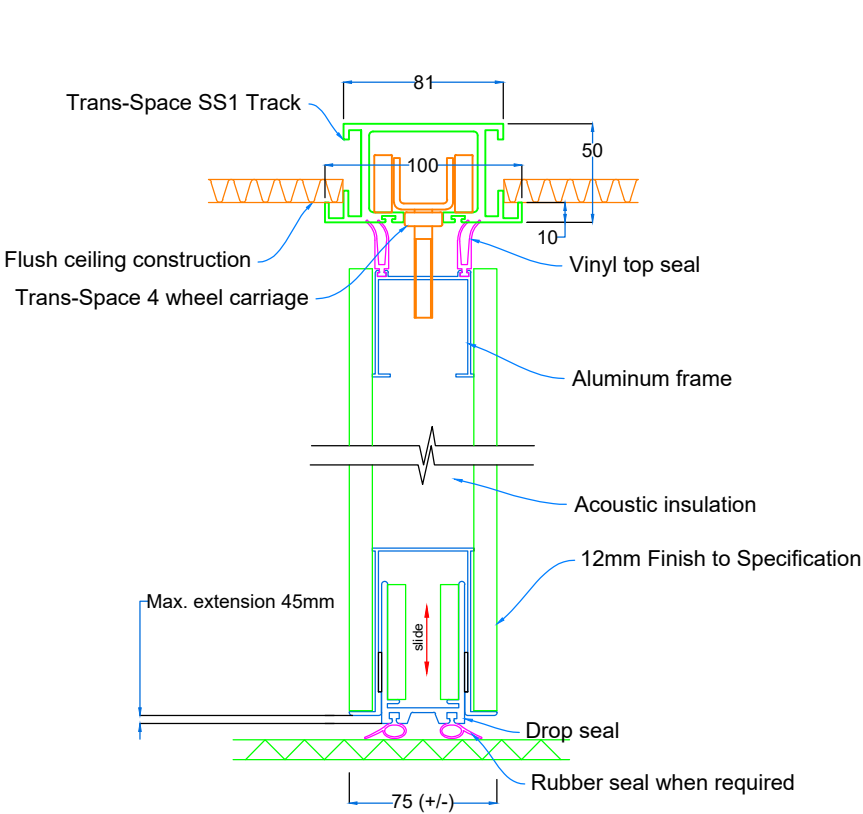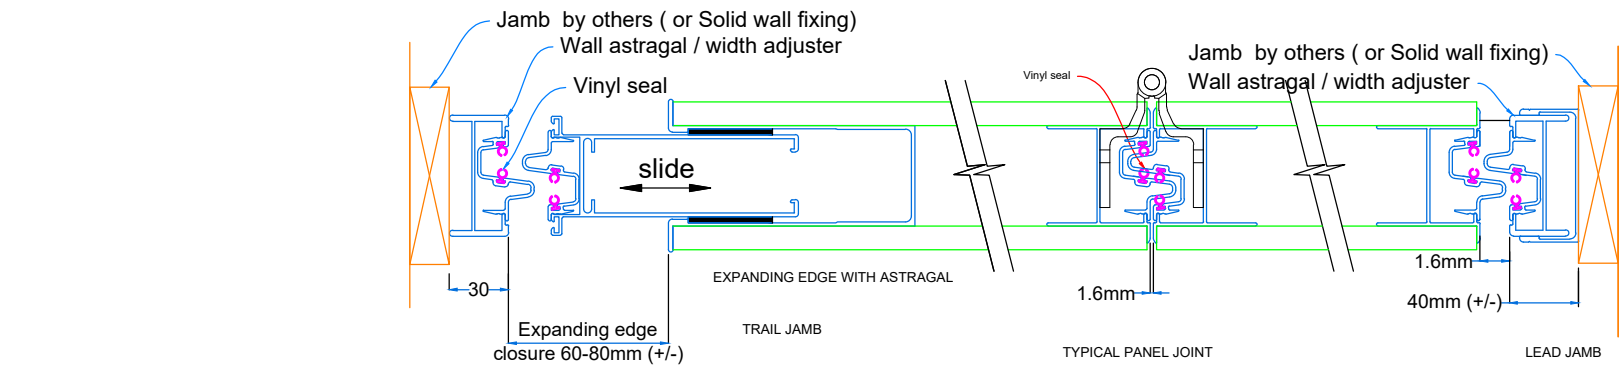

Horizontal Sectional Details

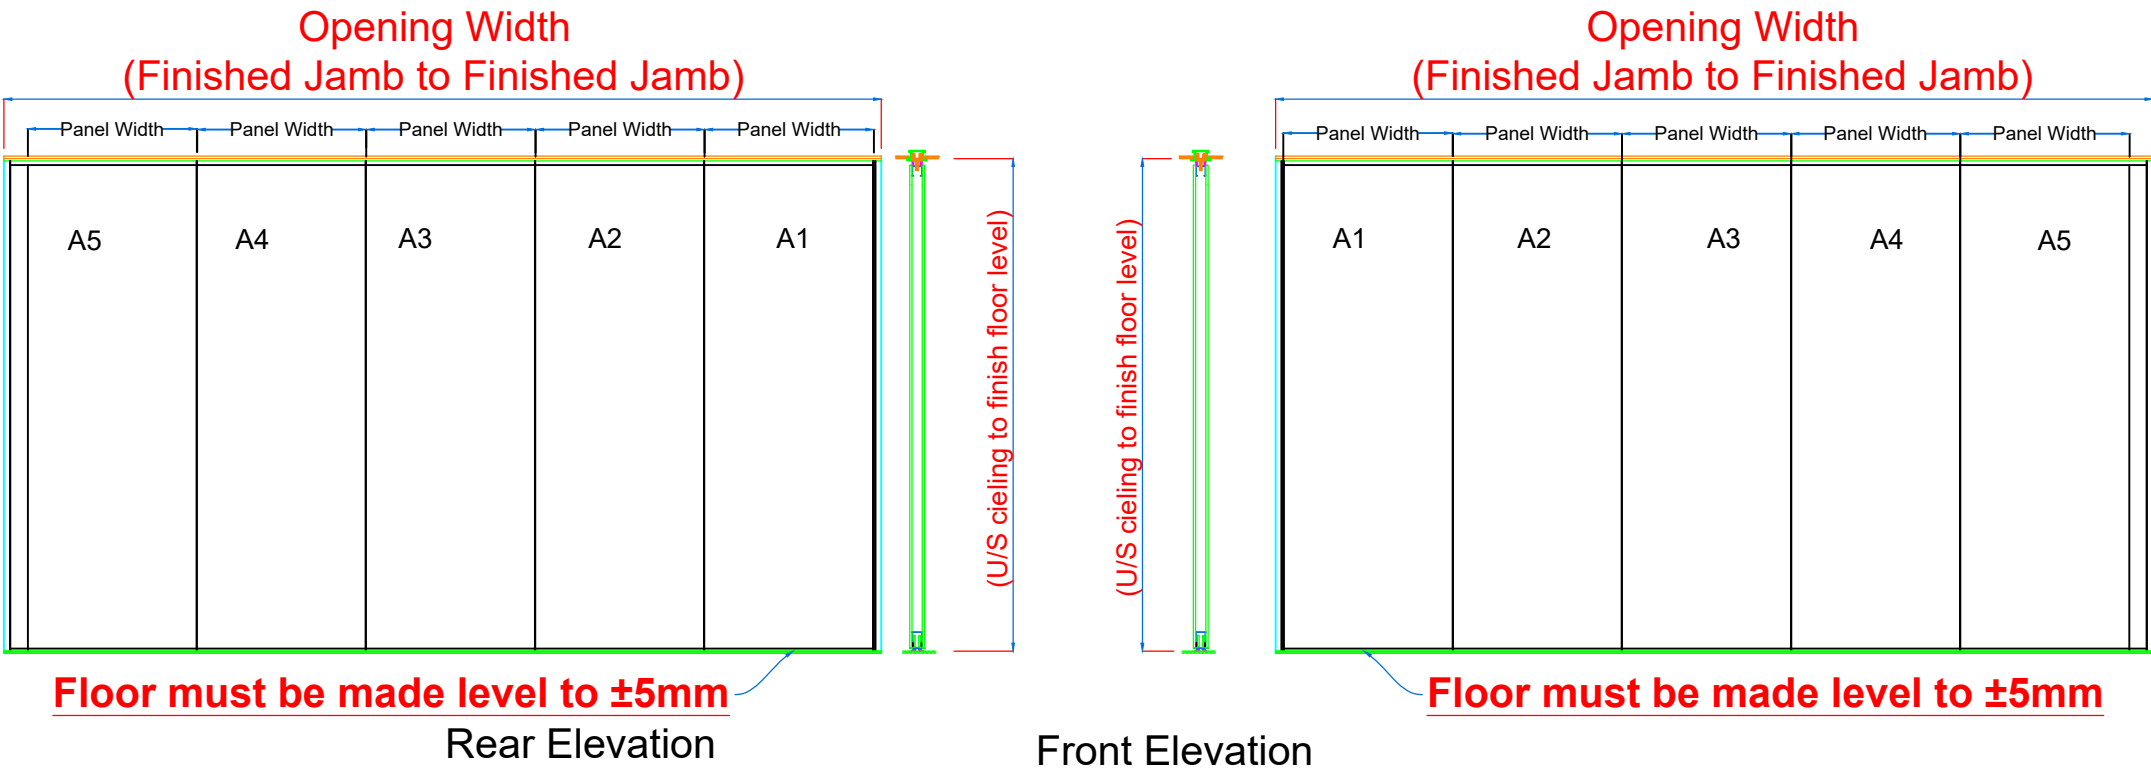

For Reference Only

Rev	Date	Change	Name

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED 0 = +/- 0.5 0.0 = +/- 0.1 0.00 = +/- 0.05	THIRD ANGLE PROJECTION DIMENSIONS IN MILLIMETRES	DESIGNER DRAWN CHECKED DATE 17-May-19	REV 1 A3 SHEET 1 SCALE NTS	TRANS-SPACE MANAGING SPACE WITH OPERABLE WALLS AND DOORS PROJECT DESCRIPTION 502 Typical Drawing CONFIGURATION 502	JOB NUMBER
---	---	---	--	---	------------